

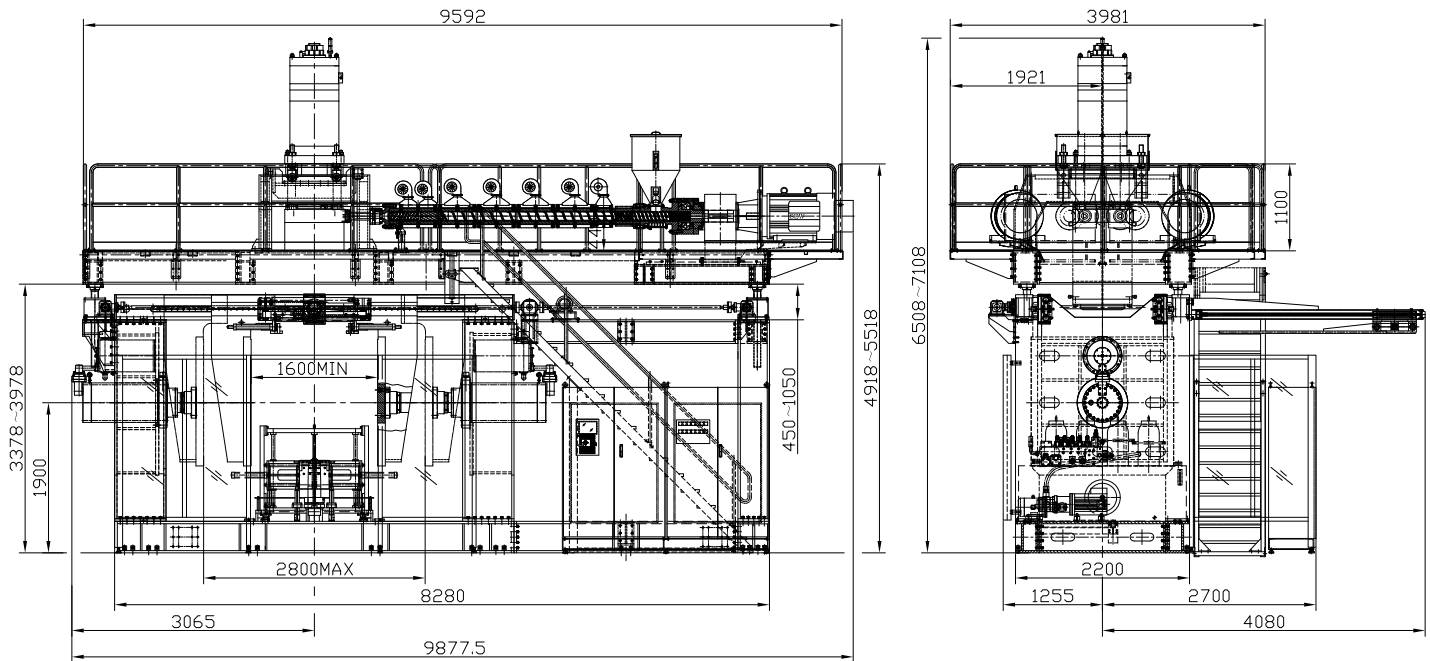


Accumulator Head AK-120 II HA (Servo Motor System)



Akei Model	AK-120HA Single Accumulator Head EBM		
Model Specification	Unit	Parameter	Remark
Screw Diameter	mm	120×2	Twin Screw
Screw Ratio(L/D)	L/D	28/1	
Extruder Speed (50 Hz)	rpm	54	
Extrusion Volume(PE)	kg/h	600	Twin Screw
VFD Controlled Motor	kW	110×2	parallel axis motor is available
Extruder Heating	Zone (s)	6×2	
Heat Section Voltage(PE)	kW	36×2	
Clamp Stroke	mm	600×2	
Clamp Force(160bar)	t	168	
Servo Electric Motor/ Inner Gear Pump	kW	56	
Cooling Motor	kW	4	
Platform Lifting Motor	kW	4	
Parison Thickness Control	Point (s)	100	
Hydraulic Servo Motor	kW	15	
Head Configuration	unit (s)	1	
Die Head Heating	Zone (s)	12	
Heat Section Voltage(PE)	kW	95.5	
Accumulating Volume(MAX)	L	55	
Product Maximum Volume	L	1000	
Total Installed Power	kW	466.5	
Water Consumption	m ³ /h	6~8	
Compressed Air Consumption(8~9BAR)	m ³ /min	4~5	
Net Weight(Approx.)	t	72	



* For Reference Only.

These specifications are for reference only. Akei reserves the rights to any modifications.

akei AKEI HOLDINGS COMPANY LIMITED
 Block A, B, C, D, E, F Kaming Fty. bldg., 688-690,
 Castle Peak Rd., Kowloon, HongKong
 TEL: +852-27411312; FAX: +852-27859560
<http://www.akei.com.hk>

AKEI INDUSTRIAL PARK (KAIPING)
 Wulong Industrial District Chikan Town
 Kaiping Guangdong Province China
 TEL: +86-0750-2168888; FAX: +86-0750-2168889
<http://www.akei.com.cn>